

FF8


- Heavy-duty supporting system for use on flat or sloped surfaces
- Height-adjustable from 295 mm to 415 mm (even after installation)
- Galvanized steel elements based on common struts channels
- Existing instalations can be extended with FF2-EXT (see pg 10)
- Other dimensions available on request



UV RESISTANT



POSITIVE/NEGATIVE

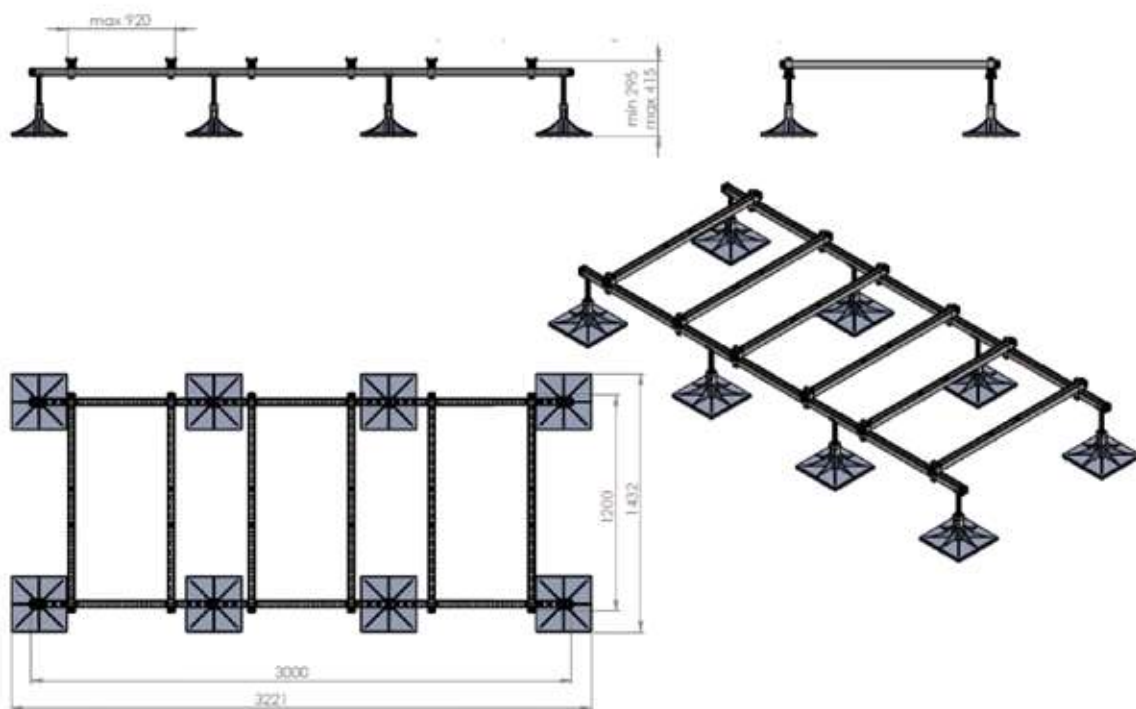

Model	FF8
Max load capacity	1620 kg
Max spreaded load capacity	540 kg/m ²
Art. nr.	0502.00027.008

